
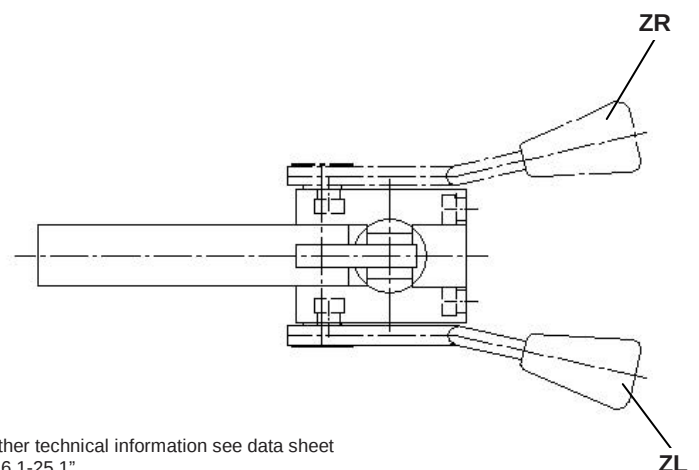
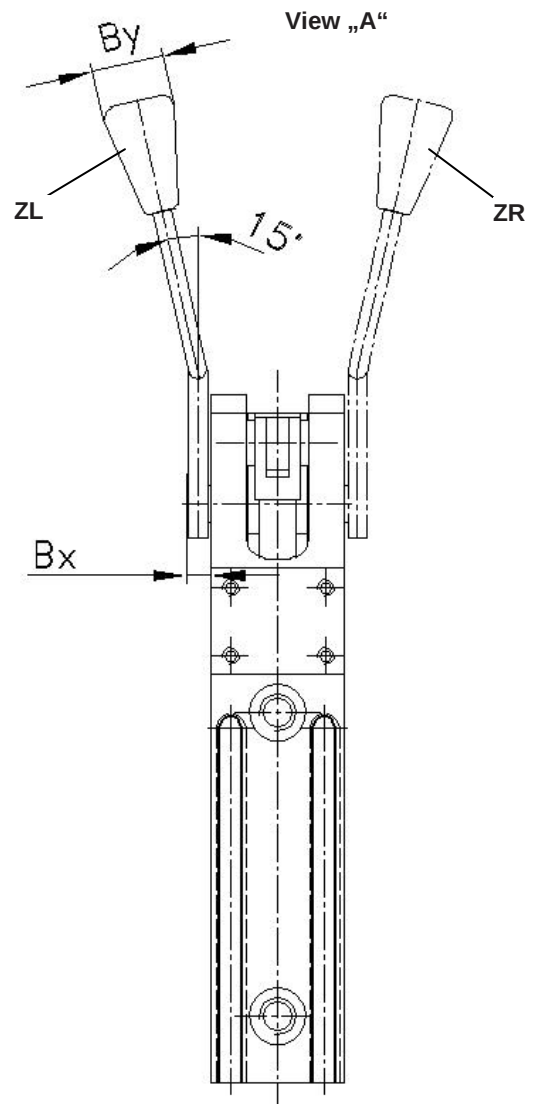


Mini Pneumatic Power Clamp

Leigh-Weight Clamp, with knee lever locked end position and hand lever

PKS 16.1-25.1 ZL/ZR

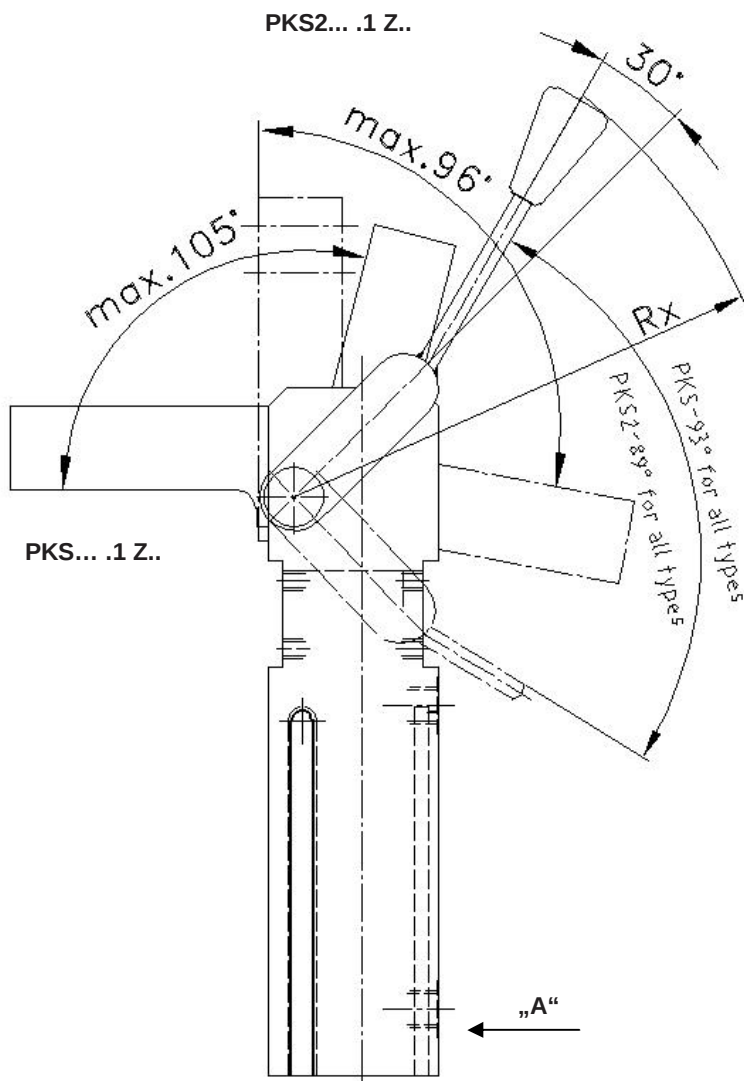

Ordering example:

PKS 16.1 ZL T03

PKS 16.1: Type
ZL: Hand lever left
(ZR = right)
Please quote when ordering!
T03: Sensing system

Ordering example Tünkers sensing systems:

...T03 Magnetic sensing, without magnetic switches prepared for sensing
...T23 Magnetic sensing, including 2 magnetic switches mounted on clamp
...T12 Inductive sensor (only PKS 25.1 ZL/ZR)

Type	Bx	By	Rx	Weight ~ (kg)
PKS 16.1 ZL/ZR	9	20	135	0.32
PKS 20.1 ZL/ZR	9	20	135	0.70
PKS 25.1 ZL/ZR	9	20	135	0.92

For further technical information see data sheet "PKS 16.1-25.1".

A 5/3-way valve is required, central position de-aerated.

Medium: Air, max. 6 bar, operation permitted with oil-free air.