


Shot pin

Pin for lift or swivel operations

SA...

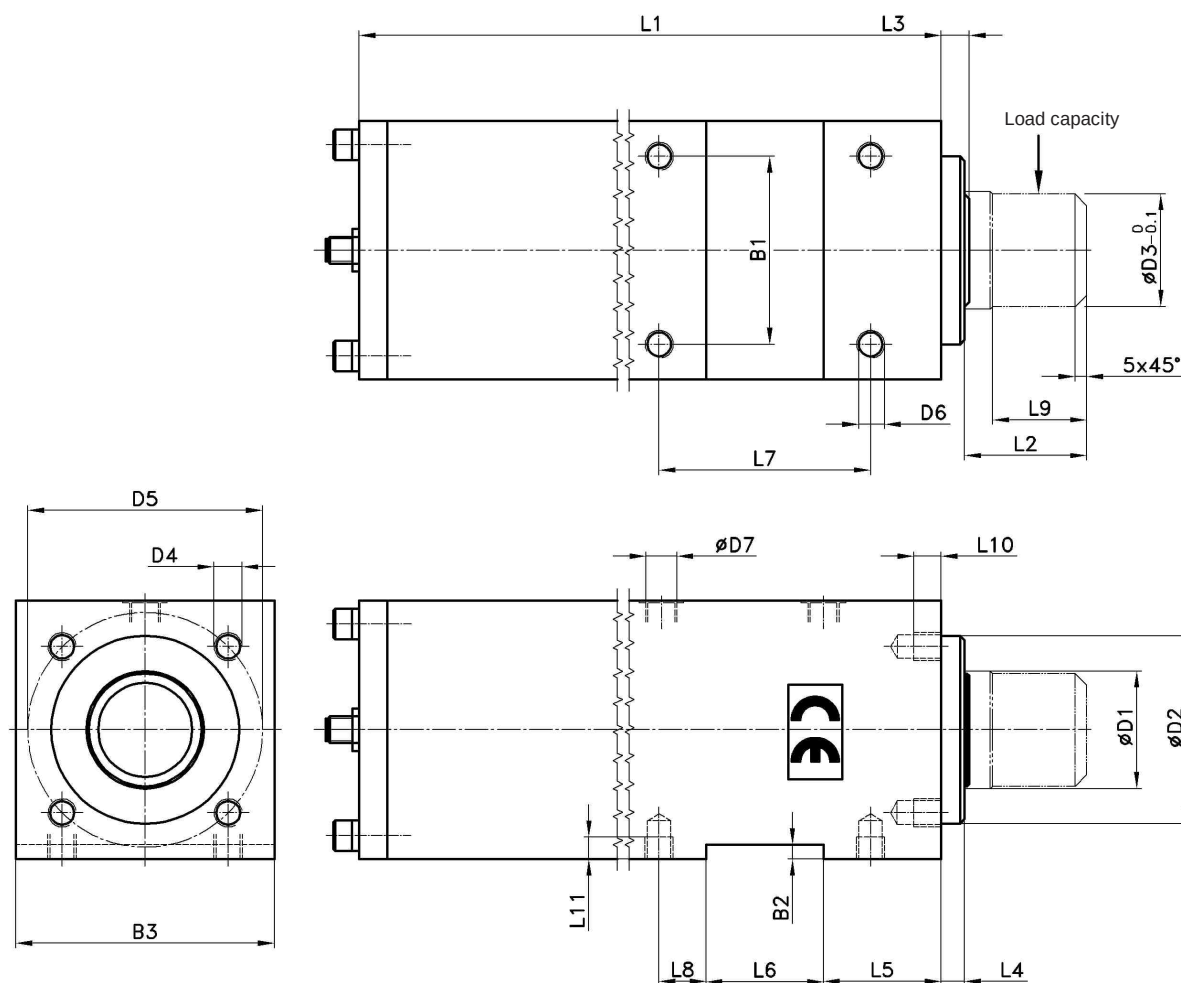

Ordering example:

SA 80-50 / 50 T01

SA 80-50: Type
50: Stroke
T01 Sensing system

Attention:

The shot pin should only be operated in unload position.
Option: Manual emergency override.

End position control occurs through mech. micro switch T01.

Colour: Red, RAL 3000

Medium: Air, max. 6 bar, operation permitted with oil-free air.

Type	Bolt Ø	Stroke	Weight ~ (kg)	Static load capacity (kg)
SA 80-50/50	50	50	6	2200
SA 100-70/80	70	80	12	6000

Type	B1	B2	B3 f	D1 f7	D2 f7	D3 -0.1	D4	D5 +0.1	D6	D7	L1	L2	L3	L4	L5	L6 +0.1	L7	L8	L9	L10	L11
SA 80-50/50	80	6	110	50	80	48	M12	105	M12	G1/4	328	52	12	10	50	50	90	20	40	16	17
SA 100-70/80	95	6	135	70	110	68	M16	140	M16	G3/8	453	85	15	10	70	150	200	25	60	25	20