


# Shot pin

Tandem design, pneumatic operated

**SAND 80**

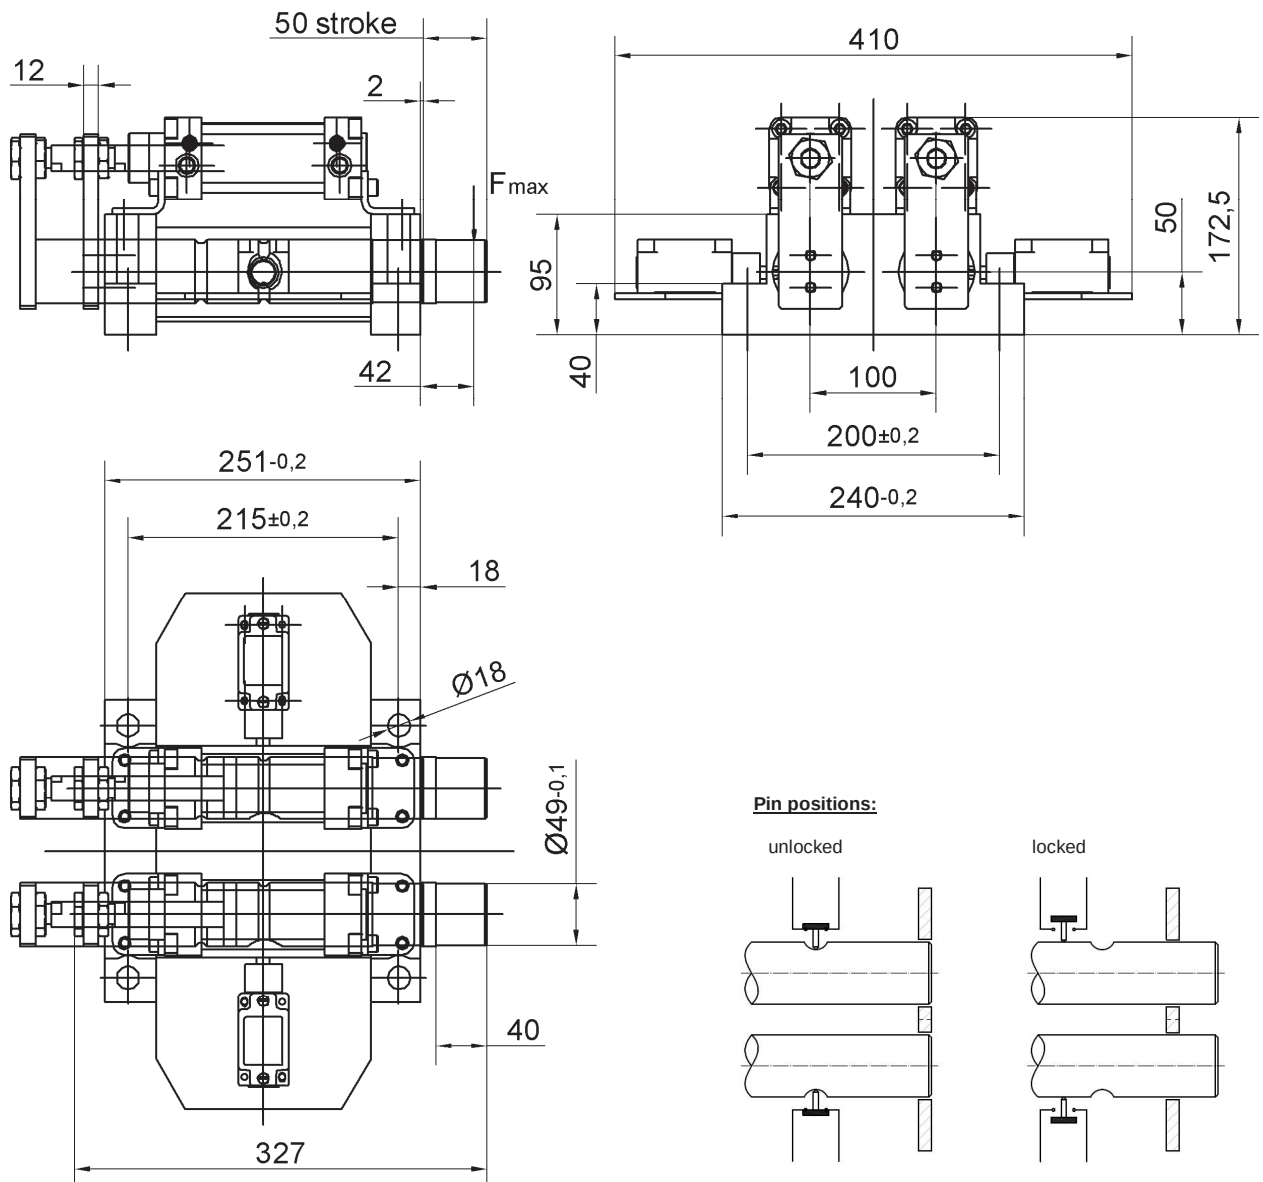

## Ordering example:

SAND 80-50/50 T12

SAND 80 :  
 50: Type  
 50: Pin Ø  
 T12: Stroke  
 Sensing system

## Attention:

- Do not operate under load.
- End position control via safety switch with roller plunger
  - Euchner (Standard)
  - other types on request
- max. load capacity (static) per pin:  $F_{max} = 22 \text{ kN}$

Medium: Air, max. 6 bar. operation permitted with oil-free air.

## Ordering example Tünkers sensing systems:

...T01S Safety switch with roller plunger  
 ...T12 Inductive sensor 24 V, 1 output  
 with integrated LED's

