


Retractable Locating Pin

with square connection, 75 mm stroke

SZUQ 63

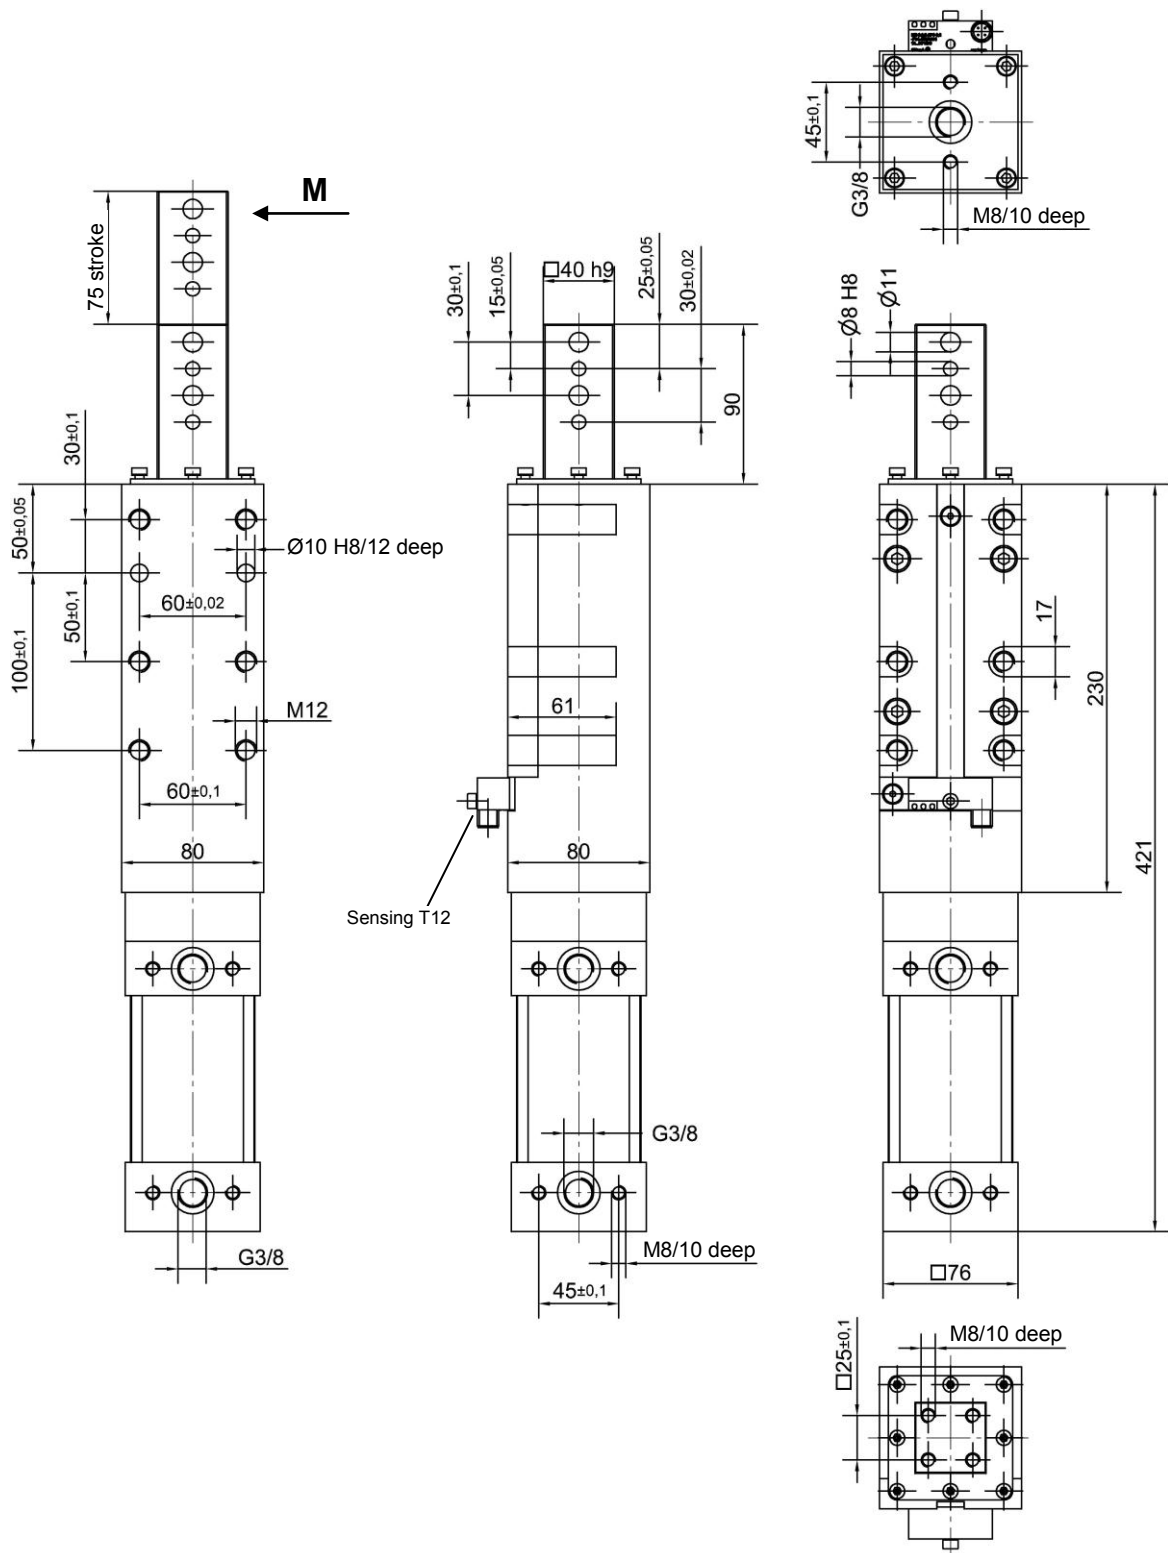

Ordering example:

SZUQ 63 T12

SZUQ 63: Type
T12: Sensing system

Ordering example Tünkers sensing system:

...T12 Inductive sensor 24 V, 1 output
with integrated LED's

Control pressure: max. 7 bar

M = max. 70 Nm

Cylinder force at 6 bar when extending: 150 daN
Cylinder force at 6 bar when retracting: 125 daN

Weight: approx. 9 kg

*Tolerance for dowel holes ± 0.02 , for threaded holes ± 0.1 .

Medium: Air, max. 6 bar, operation permitted with oil-free air.

Attention!

External throttle check valves must be provided on assembly. They are not included in the scope of delivery!