
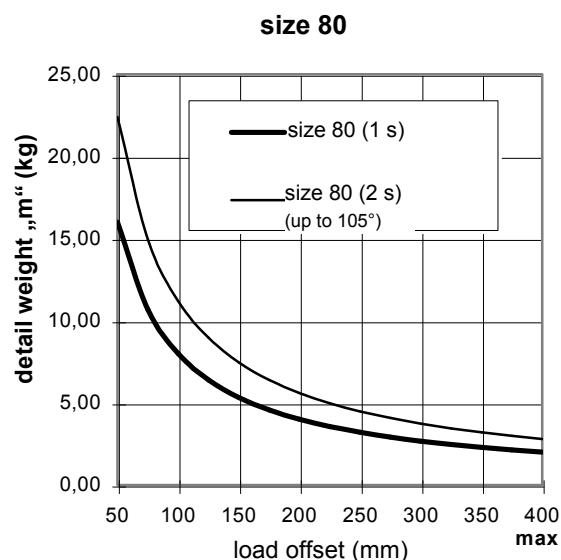
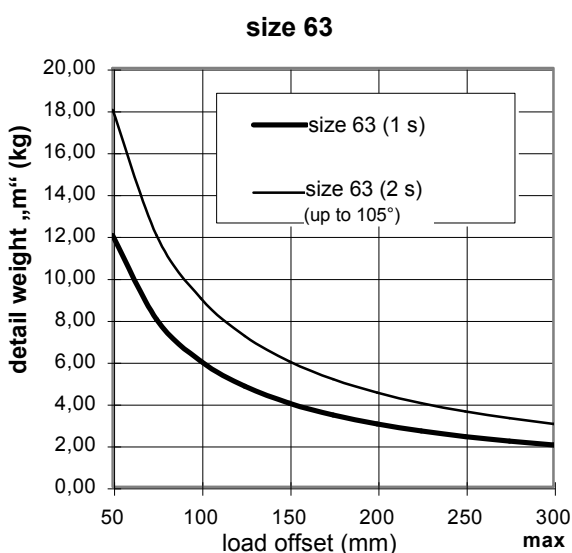
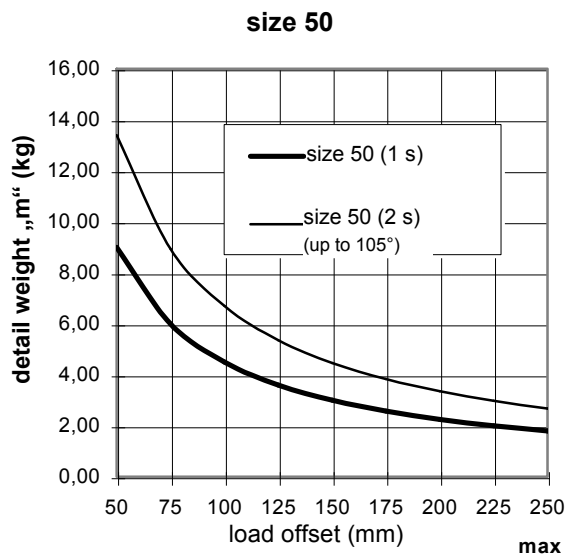


Allowable clamp arm weight against load offset of the clamp arm

U/UA...

Cylinder with end stop damping

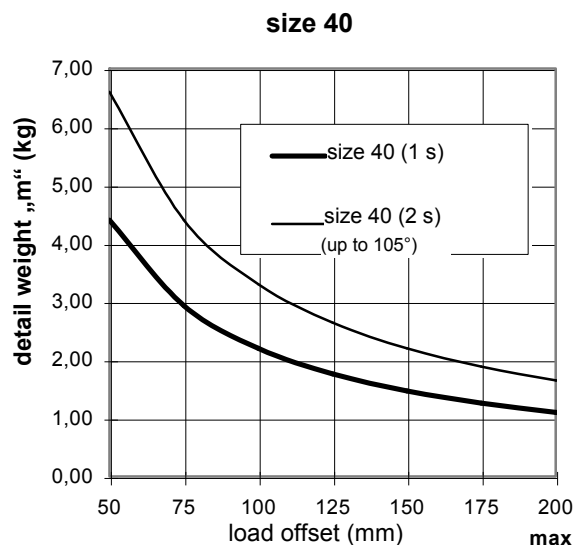


Condition: Cycle time 1 (2) second(s) to open, 1 (2) second(s) to close.

Attention: With an opening angle of more than 105 ° only 1 second opening / closing.

Attention: Operation permitted with external throttle check valves only!

* Definition:

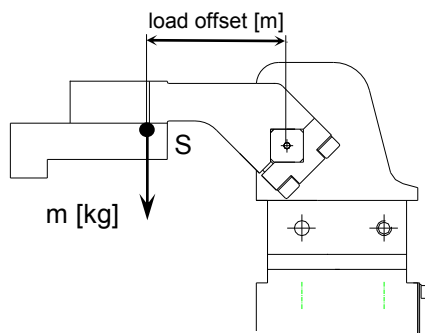

S: center of gravity of the complete clamp arm
m: detail weight

Size	Max. torque by weight	
	Cycle 1 sec.	Cycle 2 sec. (up to 105°)
40	2,2 Nm	3,3 Nm
50	4,5 Nm	6,7 Nm
63	6,0 Nm	9,0 Nm
80	8,0 Nm	11,2 Nm

